



SEIJIN MACHINERY CO., LTD.

世界最佳编织机品牌

Worldwide references in wire braiding
and winding machine

www.seijinbraid.com

Global Business

- Asia - China , India
- North America - United States of America
- South America - Mexico
- Europe - Germany
- Middle East - Turkey , Iran
- Oceania - Australia



SEIJIN MACHINERY CO., LTD.

Seijin机工自1989年设立以来，引领韩国编织机产业，韩国唯一的液压软管制造机械生产企业。

2005年开始，在中国设立当地法人运营，以数十年的经验为基础，出口到美国、中国、印度、德国、澳大利亚等10多个国家，目前，已经成为世界型编织器品牌。

我们承诺，通过不断地研究开发和严格的品质管理，为客户满意竭尽全力。

SEIJIN MACHINERY CO., LTD. has been the only leading company in braiding machine industry in Korea since its establishment in 1989.

We have been operating a subsidiary in China starting in 2005 and exporting to over 10 countries including the U.S., China, India, Germany, and Australia with decades of experience. SEIJIN has now established itself as a global braiding machine manufacturer.

We promise to always do our best to satisfy our customers with continuous R&D and strict quality control.

经济理念 ECONOMIC PHILOSOPHY

客户满意
Customer Satisfaction



品质管理
Quality Management



可持续
Continuous Development



颁发证书 CERTIFICATION



SWS 全自动钢丝缠绕机

SWS WIRE SPIRAL MACHINE

设备特点 / Features of the Equipment



- 高生产率
- 简单的自动控制系统
- 操作安全方便结构
- 自动预警系统（异常检测系统）
- High level of productivity
- Simple automatic control system
- Safe and convenient operation structure
- Automatic warning system (abnormality detecting system)

SWS WIRE SPIRAL MACHINE

名称 Name		配置 Specifications			
		30x4S	30x6S	36x4S	36x6S
电制 Power capacity		380V/60Hz			
总消耗电力 Total power consumption		62kw	88.9kw	62kw	88.9kw
生产胶管规格 Hose size		3/8"~2"	3/8"~2"	3/8"~3"	3/8"~3"
线轴 Bobbin	尺寸 Size(mm)	通径 Ø82mm, 外径 Ø172mm Dynamic diameter Ø82mm, Outer diameter Ø172mm			
	线轴种类 Type of bobbin	3 ~ 6 BOBBIN GROUP			
	钢丝线径(mm) Wire diameter(mm)	0.16mm ~ 0.6mm			
钢丝根数 Plies of wire		90~180		108~216	
节距(mm) Pitch spacing(mm)		1mm~220mm			
大盘转速 Speed of deck	内盘 Inside deck	MAX 293rpm			
	1~6盘 1~6deck	MAX 100rpm			
	牵引机 Haul off	20.6 M/min			
设备外形尺寸(WxLxH) Machine external dimensions(WxLxH)		1800x10660x2292	1800x16130x2292	1800x11510x2292	1800x17370x2292

价格和配置等会随时变更，恕不另行通知。 / Mechanical specifications can be modified to improve performance.

SWS 螺旋缠线机器

SWS SPIRAL WIRE WINDING MACHINE

设备特点 / Features of the Equipment



- 简单的自动控制系统
- 操作安全方便结构
- 自动预警系统（异常检测系统）
- Simple automatic control system
- Safe and convenient operation structure
- Automatic warning system (abnormality detecting system)

SWS SPIRAL WIRE WINDING MACHINE

名称 Name		配置 Specifications	
		380V/60Hz	
电制 Power capacity		380V/60Hz	
总消耗电力 Total power consumption		2.6kw	
线轴 Bobbin	尺寸(mm) Size(mm)	通径 Ø82mm, 外径 Ø172mm Dynamic diameter Ø82mm, Outer diameter Ø172mm	
	线轴种类 Type of bobbin	3 ~ 6 BOBBIN GROUP	
	钢丝线径(mm) Wire diameter(mm)	0.16mm ~ 0.6mm	
节距(mm) Pitch spacing(mm)		0.16mm~5mm	
线轴旋转数(rpm) Bobbin revolutions(rpm)		MAX 1500rpm	
设备外形尺寸(WxLxH) Machine external dimensions(WxLxH)		2064x2440x1174	

价格和配置等会随时变更，恕不另行通知。 / Mechanical specifications can be modified to improve performance.

SWS 张力调节器 SWS TENSION ADJUSTING MACHINE

设备特点 / Features of the Equipment



- 该机械是螺旋机械专用3集团~6集团筒管弹力调整机械。
- It is used to adjust the tension of 3 ~ 6 bobbin group for spiral machine

SWS TENSION ADJUSTING MACHINE

名称 Name	配置 Specifications
电制 Power capacity	380V/60Hz
总消耗电力 Total power consumption	0.2kw
张力秤 Tension balance	4~6 个张力秤 4~6 Total six tension balances
线轴张力 Bobbin tension	0.8kg~3kg
设备外形尺寸(WxLxH) Machine external dimensions(WxLxH)	970x1050x1479

价格和配置等会随时变更，恕不另行通知。 / Mechanical specifications can be modified to improve performance.

SMR 全自动高速钢丝编织机 SMR HIGH-SPEED WIRE BRAID MACHINE

设备特点 / Features of the Equipment



- 高生产率
- 简单的自动控制系统
- 操作安全方便结构
- 自动预警系统（异常检测系统）
- High level of productivity
- Simple automatic control system
- Safe and convenient operation structure
- Automatic warning system (abnormality detecting system)

SMR HIGH SPEED WIRE BRAIDING MACHINE

名称 Name	配置 Specifications			
	16CR	20CR	24CR	36CR
电制 Power capacity	380V/50Hz			
总消耗电力 Total power consumption	15.1kw	15.9kw	15.9kw	19.1kw
生产胶管规格 Hose size	1/4"	1/4"~3/8"	3/8"~1/2"	3/4"~1 1/4"
线轴 Bobbin	尺寸(mm) Size(mm) 通径 \varnothing 44.5mm, 外径 \varnothing 140mm, 内宽 158mm, 外宽 193mm Dynamic diameter \varnothing 44.5mm, Outer diameter \varnothing 140mm Inner width 158mm, Outer width 193mm			
	钢丝线径(mm) Wire diameter(mm) 0.16mm ~ 0.6mm			
钢丝根数 Number of the wire	4 ~ 12			
节距(mm) Pitch spacing(mm)	1mm ~ 100mm			
锭子转速(rpm) Revolution of carrier(rpm)	72rpm	72rpm	68rpm	50rpm
锭子张力(kg) Carrier tension(kg)	5kg ~ 11kg			
牵引机速度(MAX) Haul-off Speed	MAX 5.1M / min			
设备外形尺寸(WxLxH) Machine external dimensions(WxLxH)	1810x6100x2285	1810x6100x2285	1810x6100x2285	1860x6100x2450

价格和配置等会随时变更，恕不另行通知。 / Mechanical specifications can be modified to improve performance.

SMW 全自动钢丝编织机 SMW WIRE BRAID MACHINE

设备特点 / Features of the Equipment



- 简单的自动控制系统
- 操作安全方便结构
- 自动预警系统（异常检测系统）
- Simple automatic control system
- Safe and convenient operation structure
- Automatic warning system (abnormality detecting system)

SMW WIRE BRAID MACHINE

名称 Name	配置 Specifications							
	16CR	20CR	24CR	36CR	48CR	64CR	96CR	
电制 Power capacity	380V/60Hz (380V/50Hz)							
总消耗电力 Total power consumption	单盘 Single	5.2kw	5.2kw	5.2kw	7kw	11.2kw	14.7kw	27.5kw
	双盘 Double	8.9kw	12.5kw	12.5kw	16.5kw	25.7kw	33.7kw	-
生产胶管规格 Hose size	1/4"	1/4"~3/8"	3/8"~1/2"	3/4"~1 1/4"	1 1/2"~2 1/2"	3"~5"	5"~8"	
线轴 Bobbin	尺寸(mm) Size(mm)	通径 \varnothing 31mm, 外径 \varnothing 83mm, 轴孔 \varnothing 19.5mm, 内宽 203mm, 外宽 229mm Dynamic diameter \varnothing 31mm, Outer diameter \varnothing 83mm, Axial diameter \varnothing 19.5mm, Inner width 203, Outer width 229						
	钢丝线径(mm) Wire diameter	0.16mm ~ 0.6mm						
节距(mm) Pitch spacing	15mm~75mm	18mm~90mm	25mm~100mm	45mm~150mm	60mm~250mm	100mm~500mm	200mm~1200mm	
锭子转速 60HZ Revolution of carrier 60HZ	MAX 43 rpm	MAX 36 rpm	MAX 30 rpm	MAX 20 rpm	MAX 15 rpm	MAX 11 rpm	MAX 7 rpm	
锭子张力(kg) Carrier tension(kg)	5kg~9kg							
设备外形尺寸(WxLxH) Machine external dimensions(WxLxH) Single	1025x3835x1815	1150x3970x1880	1260x3970x1940	1630x4215x2120	2020x4745x2510	2410x5165x3000	5010x9070x5160	
设备外形尺寸(WxLxH) Machine external dimensions(WxLxH) Double	1025x5670x1815	1150x5687x1880	1260x5687x1940	1630x6015x2120	2020x7005x2510	2410x8610x3000	-	

价格和配置等会随时变更，恕不另行通知。 / Mechanical specifications can be modified to improve performance.

钢丝合股机 WIRE WINDING MACHINE

设备特点 / Features of the Equipment



- 简单的自动控制系统
- 操作安全方便结构
- 自动预警系统（异常检测系统）
- Simple automatic control system
- Safe and convenient operation structure
- Automatic warning system (abnormality detecting system)


WIRE WINDING MACHINE

名称 Name	配置 Specifications	
电制 Power capacity	380V/60Hz (380V/50Hz)	
总消耗电力 Total power consumption	6.25kw	
线轴 Bobbin	尺寸(mm) Size (mm)	通径 \varnothing 140mm, 外径 \varnothing 45mm, 内宽 173mm, 外宽 199mm Outer diameter \varnothing 140mm, Dynamic diameter \varnothing 45mm Inner width 173mm, Outer width 199mm
	线轴种类 Type of bobbin	外径 \varnothing 83mm ~ \varnothing 140mm Outer diameter \varnothing 83mm ~ \varnothing 140mm
	钢丝线径 (mm) Wire diameter (mm)	0.16mm ~ 0.6mm
钢丝根数 Number of the wire	4~12	
节距(mm) Pitch spacing(mm)	0.5mm~30mm	
线轴锭子(rpm) Bobbin revolutions(rpm)	MAX 1500rpm	
设备外形尺寸(WxLxH) Machine external dimensions(WxLxH)	1565 x 2100 x 1846	

价格和配置等会随时变更，恕不另行通知。 / Mechanical specifications can be modified to improve performance.

盘卷机 TAKE-UP MACHINE

设备特点 / Features of the Equipment

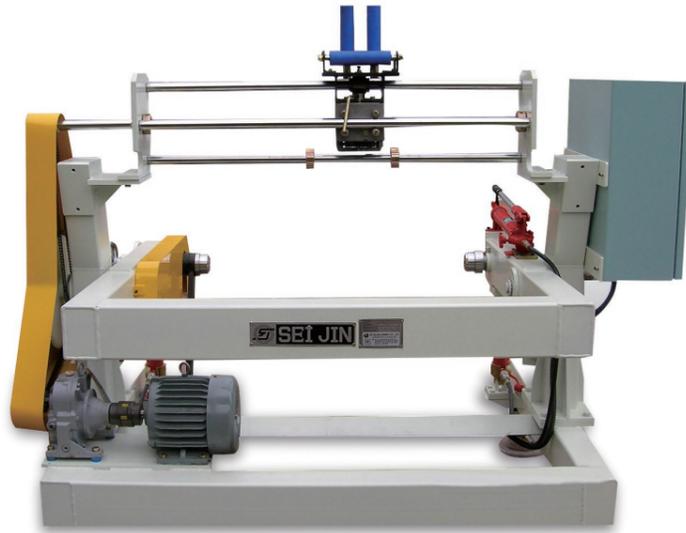

- 该机械用不同的频率将不同编织机生产的软管根据粗细均匀卷在桶上的装置。
- It is used to wind the hose, which is produced from braiding machine, on the drum evenly by thickness with a proper pitch.


TAKE-UP MACHINE

名称 Name	配置 Specifications
电制 Power capacity	380V/60Hz
总消耗电力 Total power consumption	1.6kw
胶管尺寸 Hose size	外径 \varnothing 8mm~ \varnothing 30mm Outer diameter \varnothing 8mm~ \varnothing 30mm
节距(mm) Pitch spacing(mm)	5.9mm~59mm 可以连续调整 5.9mm~59mm Continuously adjustable
桶规格 Drum size	\varnothing 1200 DRUM ~ \varnothing 1600 DRUM
设备外形尺寸(WxLxH) Machine external dimensions(WxLxH)	1645 x 1200 x 1670

价格和配置等会随时变更，恕不另行通知。 / Mechanical specifications can be modified to improve performance.

放卷机 PAY-OFF MACHINE

设备特点 / Features of the Equipment

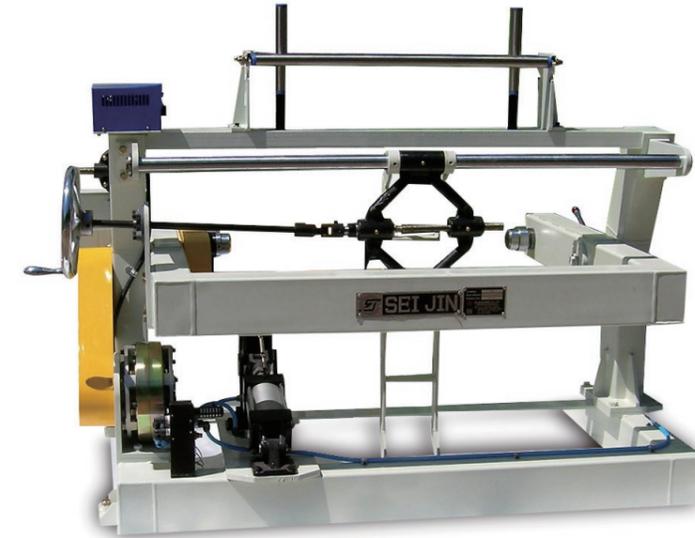

- 安装在压出机及编织机后侧，放松桶上卷曲软管的机械。
- This machine is to be placed in the rear side of extruder or braider to release the wound hose on the drum.

PAY-OFF MACHINE

名称 Name	配置 Specifications
磁粉离合器 Powder brake	0.1kw
电制 Power capacity	380V/60Hz
胶管尺寸 Hose size	外径 \varnothing 8mm~ \varnothing 30mm Outer diameter \varnothing 8mm~ \varnothing 30mm
桶规格 Drum size	\varnothing 1200 DRUM~ \varnothing 1600 DRUM
设备外形尺寸(WxLxH) Machine external dimensions(WxLxH)	1780 x 1500 x 1670

价格和配置等会随时变更，恕不另行通知。 / Mechanical specifications can be modified to improve performance.



SEIJIN MACHINERY CO., LTD.

韩国SEIJIN

地址：京畿道南杨州市瓦阜邑月文里 115-22
电话：+82-31-576-5376
传真：+82-31-576-9281
邮件：sjbraid@naver.com
网址：www.seijinbraid.com

SEIJIN KOREA

Add : 115-22, Wolmun-ri, Wabu-eup,
Namyangju-si, Gyeonggi-do, Korea
Tel : +82-31-576-5376
Fax : +82-31-576-9281
E-mail : sjbraid@naver.com
Website : www.seijinbraid.com

中国SEIJIN

地址：中国天津市津南区小站工业区二号路20号 世振机械(天津)有限公司
电话：+86-22-2861-6028
传真：+86-22-2861-6029
邮件：seijin2@163.com
网址：www.seijinchina.com

SEIJIN CHINA

Add : No. 2 NO. 2 Road, Xiaozhan Industrial Park, Industrial Park
Jinnan District, Tianjin, China.
Tel : +86-22-2861-6028
Fax : +86-22-2861-6029
E-mail : seijin2@163.com